

DESCRIPTIONMETHOD AND PLANT FOR APPLYING A HEAT-SHRINKABLE LABEL  
TO CONTAINERS5 TECHNICAL FIELD

This invention relates in general to a method for labelling containers by means of a heat-shrinkable label, and a plant for implementing said method.

The method of the invention can be applied generally to any container,  
10 and in particular to those containers in the form of a containing tub, with the upper mouth of which there is associated an outer rim or collar projecting beyond the outer surface of the tub.

BACKGROUND ART

15 In the known art, containers are labelled by suitable labelling machines positioned in series with the machines which form and fill the containers. Specifically, in the known art a plurality of containers are formed simultaneously such that their outer rims are joined together. When the containers have been formed with their mouths facing upwards, they are  
20 filled with the product which they are to receive, after which the container mouth is sealed by a suitable lid. The filled and sealed containers pass through a separation station where blade-type cutting devices are present which incise and/or cut the rims joining the containers together in order to separate them.

25 Each container is then inverted and fed to a labelling machine, which mounts from above onto the body of the container a heat-shrinkable label

in the form of an annular band, so that it rests on the container outer rim. The container provided with the label is then fed through a heating tunnel where the label is made to adhere to the container body by heat. On termination of this operation the container must be again inverted, and  
5 then fed to packaging means of usual type.

The aforesaid method is complicated to carry out as each container must be inverted to enable the band-shaped label to be mounted on it from above. This complication is accentuated if the containers contain different products or the same product but of a different flavour. In such a case  
10 suitable means must be provided for handling the containers so that the correct label for the product concerned is applied.

An object of this invention is to overcome the drawbacks of the known art within the framework of a simple, reliable and rational solution, able to reduce the final cost.

15

#### DISCLOSURE OF THE INVENTION

The invention attains this and other objects by virtue of the characteristics defined in the claims.

In particular, the invention provides a container labelling method

20 comprising the following operative steps:

- a. predisposing a support device for at least one container having a mouth with which an outer rim is associated,
- b. from below, mounting onto the body of said at least one container a heat-shrinkable label in the form of an annular band,
- 25 c. causing the label to adhere to said container.

According to the invention the label is made to adhere to the container body by a hot fluid which by heating the label causes it to heat-shrink. Said hot fluid is preferably a jet of steam or hot air.

The method of the invention is implemented by a plant comprising a  
5 device for supporting and transporting at least one container, means for mounting a heat-shrinkable label onto said at least one container from below, and means for causing said label to adhere to said container by heat-shrinkable.

Said support device generally grips the container in proximity to its mouth,  
10 but can also support the container from below depending on the type of container to be labelled.

In a first embodiment of the invention the support device comprises two parallel steel cables which support the container rim by acting on the lower surface of the rim. The container is made to translate by a gripper which  
15 grips the container rim.

In a different embodiment the support device comprises grippers for gripping the container rim. In other embodiments of the invention the container is gripped from the interior of its mouth.

According to a first embodiment of the invention said means for causing  
20 the label to adhere to the container comprise a shrinkage tunnel provided with heating devices arranged to release a hot fluid which acts on the outer surface of the label. The hot fluid heats the label which by heat-shrinkage then shrinks to adhere to the container.

According to a second and preferred embodiment of the invention, said  
25 means for causing the label to adhere to the container are associated with means for mounting the label onto the container from below.

From the foregoing it is apparent that by virtue of the invention, labels can be applied to containers while still joined together, so enabling multi-packs to be made up. Moreover the method of the invention is suitable for direct application along the container forming and filling line, leading to an  
5 overall size reduction and prevention of interface problems. In this respect, the label can be mounted at any point of the machine after the containers have been formed.

For a better understanding of the operation of the method of the invention and the characteristics and constructional merits of the relative means of  
10 implementation, reference is made hereinafter to the figures of the accompanying drawings which illustrate, by way of non-limiting example, two preferred embodiments of the plant for implementing the aforesaid method.

Figure 1 is a schematic view of a first embodiment of the invention.

15 Figure 2 is an enlarged partial view of Figure 1.

Figure 3 is an enlarged partial view in the direction III of Figure 2.

Figure 4 is an enlarged partial view in the direction IV of Figure 1.

Figures 5, 6, 7 and 8 show the operative steps of the first embodiment of the invention.

20 Figure 9 shows a second embodiment of the invention.

Figure 10 is a partial view in the direction X of Figure 9.

Figures 11 and 12 show two operative steps of the second embodiment of the invention.

Figure 13 is a partial view in the direction XIII of Figure 12.

25 Said figures show the plant 1, which comprises two parallel rows of containers 2 obtained by thermoforming. Each container 2 comprises a

cup-shaped body 20 with an outer upper rim 21 which projects beyond said body 20, and by means of which each container is joined to the adjacent container. The containers 2 of each row are supported by a support and transport device 3 comprising two spaced-apart parallel steel  
 5 cables 30 (Figure 2) on which the rim 21 of each container rests.

The containers are advanced along the cables 30 by a usual gripper, not shown, which grips the rim 21 of the containers and causes them to advance along said cables 30.

Below the containers 2 there are positioned means 4 for applying an  
 10 annular band-shaped label 5 to the body 20 of the containers 2. In this embodiment said means 4 are able to mount a label onto four containers 2 simultaneously. In detail, the means 4 comprise a carriage 40 arranged to translate on guides 410 by virtue of a linkage, not shown.

On the carriage 40 there are provided four vertical hydraulic cylinder-  
 15 piston units 41, two of which are visible in Figure 1, for supporting a first horizontal plate 42 and causing it to translate vertically.

With the plate 42 there are associated four identical label support units 50, each comprising four rods 45 branching from a movable second plate 43 supported by the plate 42 by virtue of the cylinder-piston units 44.

20 Said rods 45 are inserted through four matching holes present in the plate 42 and pass beyond the plate to externally receive the annular labels 5.

In practice, the function of the rods 45 is to maintain the labels 5 widened while they are mounted onto the body 20 of the container 2.

With reference to Figure 3, the rods 45 of each support unit are disposed  
 25 on the perimeter of an imaginary circumference, the centre of which passes through the vertical axis of each container and are spaced equally

apart. Moreover as the label 5 has to adhere to only an axial portion of the container body. each label rests on an annular spacer 46 extending from the plate 42.

Downstream of the carriage 40, means 6 are provided to cause the labels  
5 to adhere to the bodies of the containers 2. Said means 6 comprise a tunnel 60 of usual type provided with devices, not shown as they are of known type, for heating the label by means of a hot fluid, such as a jet of steam or hot air. By the effect of the hot fluid the labels 5 are heated and shrink to adhere to the body 20 of the container 2.

10 The operation of the invention is described hereinafter with reference to Figures 1, 5, 6, 7 and 8.

The labels 5 are firstly positioned on the carriage 40 by means not shown. The carriage 40 is then moved below the containers 2 so that each label 5 lies below the respective container 2 on which it is to be mounted. At this  
15 point, by operating the cylinder-piston units 41 the plate 42 is made to rise to mount the label on the body of the overlying container 2, as shown in Figure 5.

When the labels 5 have been mounted on the containers 2, the cylinder-piston units 41 are operated to lower the plate 43 carrying the rods 45, so  
20 that the rods lying between the labels and the container bodies are themselves lowered (Figure 6).

At this point the carriage 40 is made to translate to bring the containers 2 into the interior of the heat-shrinkage tunnel 60, where suitable heating devices heat the labels 5 which, by the effect of the heat, shrink to adhere  
25 to the body 20 of the containers 2.

On termination of the shrinkage process the plate 42 is lowered and the carriage 40 repositioned outside the shrinkage tunnel, into its initial position shown in Figure 1. At this point the cycle is repeated in an identical manner.

- 5    Figures 9 to 13 show a second embodiment of the invention for labelling containers 35. As can be seen from the figures the individual containers 35 are supported by a support device 36 comprising grippers 37 arranged to grip them in correspondence with an upper collar 38.

In the description of the second embodiment of the invention the same  
10    reference numerals are used to indicate components identical to those already described.

With reference to Figure 4, this shows that the carriage 40 supports, by means of four identical columns 400, a fixed plate 51 on which four support units 50 for the labels 5 are present.

- 15    Each unit 50 comprises four fixed rods 45 on which there is mounted a movable plate 52 which can translate vertically relative to said rods 45 by virtue of two cylinder-piston units 53 which connect it to the fixed plate 51. The movable plate 52 carries both said label support means and the means for causing each label 5 to adhere to the body of the respective  
20    container 35. Specifically, the support means for the labels comprise the annular spacers 46, and the means for causing the labels to adhere comprise for each unit 50 a cylinder 54 mounted about each group of four rods 45 and a series of dispenser nozzles 55 (Figure 13).

The dispenser nozzles 55 are supported by the movable plate 52, which  
25    comprises a circuit, not shown, for connecting the dispenser nozzles 55 to

a usual system, not shown, for delivering a hot fluid, such as hot air or steam.

With reference to Figure 13, the dispenser nozzles 55 are equidistant and disposed on an imaginary circumference, the centre of which lies on the label axis, and are external to the circumference on which the rods 45 are positioned. In this case the operation of the invention is very simple, and is illustrated in Figures 9 to 13. With reference to the figures the labels 5 are firstly positioned on the units 50, then the carriage 40 is positioned below the containers 35, so that each container 35 lies exactly above the unit 50 carrying the label 5.

When the carriage 40 is in position the cylinder-piston units are operated to raise the movable plate 52 so as to mount the labels 5 on the containers 35 by withdrawing them from the rods 45. At this point the pressurized fluid delivery system is operated to heat the labels, which by heat-shrinkage adhere to the containers 35.

## CLAIMS

1. A container labelling method comprising the following operative steps:
  - a. predisposing means for supporting at least one container in an erect position,
  - b. from below, mounting onto the body of said at least one container a heat-shrinkable label in the form of an annular band,
  - c. causing the label to adhere to said container.
2. A method as claimed in claim 1, characterised in that said support means act in proximity to the upper end of the container.
3. A method as claimed in claim 1, characterised in that said at least one container upperly presents an outer rim or collar.
4. A method as claimed in claim 3, characterised in that said support means act on said rim or collar.
5. A method as claimed in claim 2, characterised in that the label adheres to the container by heat-shrinkage due to the action of a hot fluid.
6. A method as claimed in claim 5, characterised in that said fluid is steam.
7. A method as claimed in claim 5, characterised in that said fluid is hot air.
8. A container labelling plant, comprising a device for supporting and transporting at least one container, and means for mounting a heat-shrinkable annular band onto said container, characterised in that said device for supporting said at least one container acts from above on the container suspended in an erect position, the means for mounting a heat-shrinkable label onto said container acting from below, means being

provided to cause said label to adhere to said container by heat-shrinkage.

9. A plant as claimed in claim 8, characterised in that said at least one container comprises a rim or collar, said support and transport device  
5 comprising at least two steel cables supporting the container rim, and at least one gripper arranged to grip said rim to cause said at least one container to translate along said steel cables.

10. A plant as claimed in claim 8, characterised in that said support device supports said container by means of a gripper arranged to act in a  
10 region close to the container mouth.

11. A plant as claimed in claim 10, characterised in that said support device acts on a collar or rim of the container.

12. A plant as claimed in claim 8, characterised in that said means for mounting said label onto said container comprise at least one movable  
15 support plate for the label disposed vertically.

13. A plant as claimed in claim 8, characterised in that a unit for maintaining the label vertical is associated with said plate.

14. A plant as claimed in claim 13, characterised in that said unit comprises four rods.

20 15. A plant as claimed in claim 13, characterised in that said unit for maintaining the label vertical is movable relative to said plate.

16. A plant as claimed in claim 13, characterised in that said unit is fixed relative to said plate.

17. A plant as claimed in claim 8, characterised in that said means for  
25 causing the label to adhere by heat-shrinkage comprises a system for delivering a hot fluid.

18. A plant as claimed in claim 17, characterised in that said hot fluid is steam.

19. A plant as claimed in claim 17, characterised in that said hot fluid is air.

5 20. A plant as claimed in claim 8, characterised in that said means for causing the label to adhere by heat-shrinkage are associated with said means for mounting the label onto the container.

21. A plant as claimed in claims 12 and 20, characterised in that said means are associated with said plate.

10 22. A plant as claimed in claim 17, characterised in that said means for causing the label to adhere to the container comprise a cylinder and a plurality of dispensing nozzles for a hot fluid.

23. A plant as claimed in claims 21 and 22, characterised in that said plate comprises a circuit for connecting said dispensing nozzles to said  
15 hot fluid delivery system.

24. A plant as claimed in claim 10, characterised by being positioned along the container forming and filling line.

## METHOD AND PLANT FOR APPLYING A HEAT-SHRINKABLE LABEL TO CONTAINERS

### ABSTRACT

- 5 A container labelling method consisting of predisposing means for supporting at least one container in an erect position; from below, mounting onto the body of said at least one container a heat-shrinkable label in the form of an annular band; and causing the label to adhere to said container. The method is implemented by a plant comprising a
- 10 device for supporting and transporting at least one container which acts from above on the container suspended in an erect position; means for mounting a heat-shrinkable annular band onto the container from below; and means for causing said label to adhere to said container by heat-shrinkage.

1/9

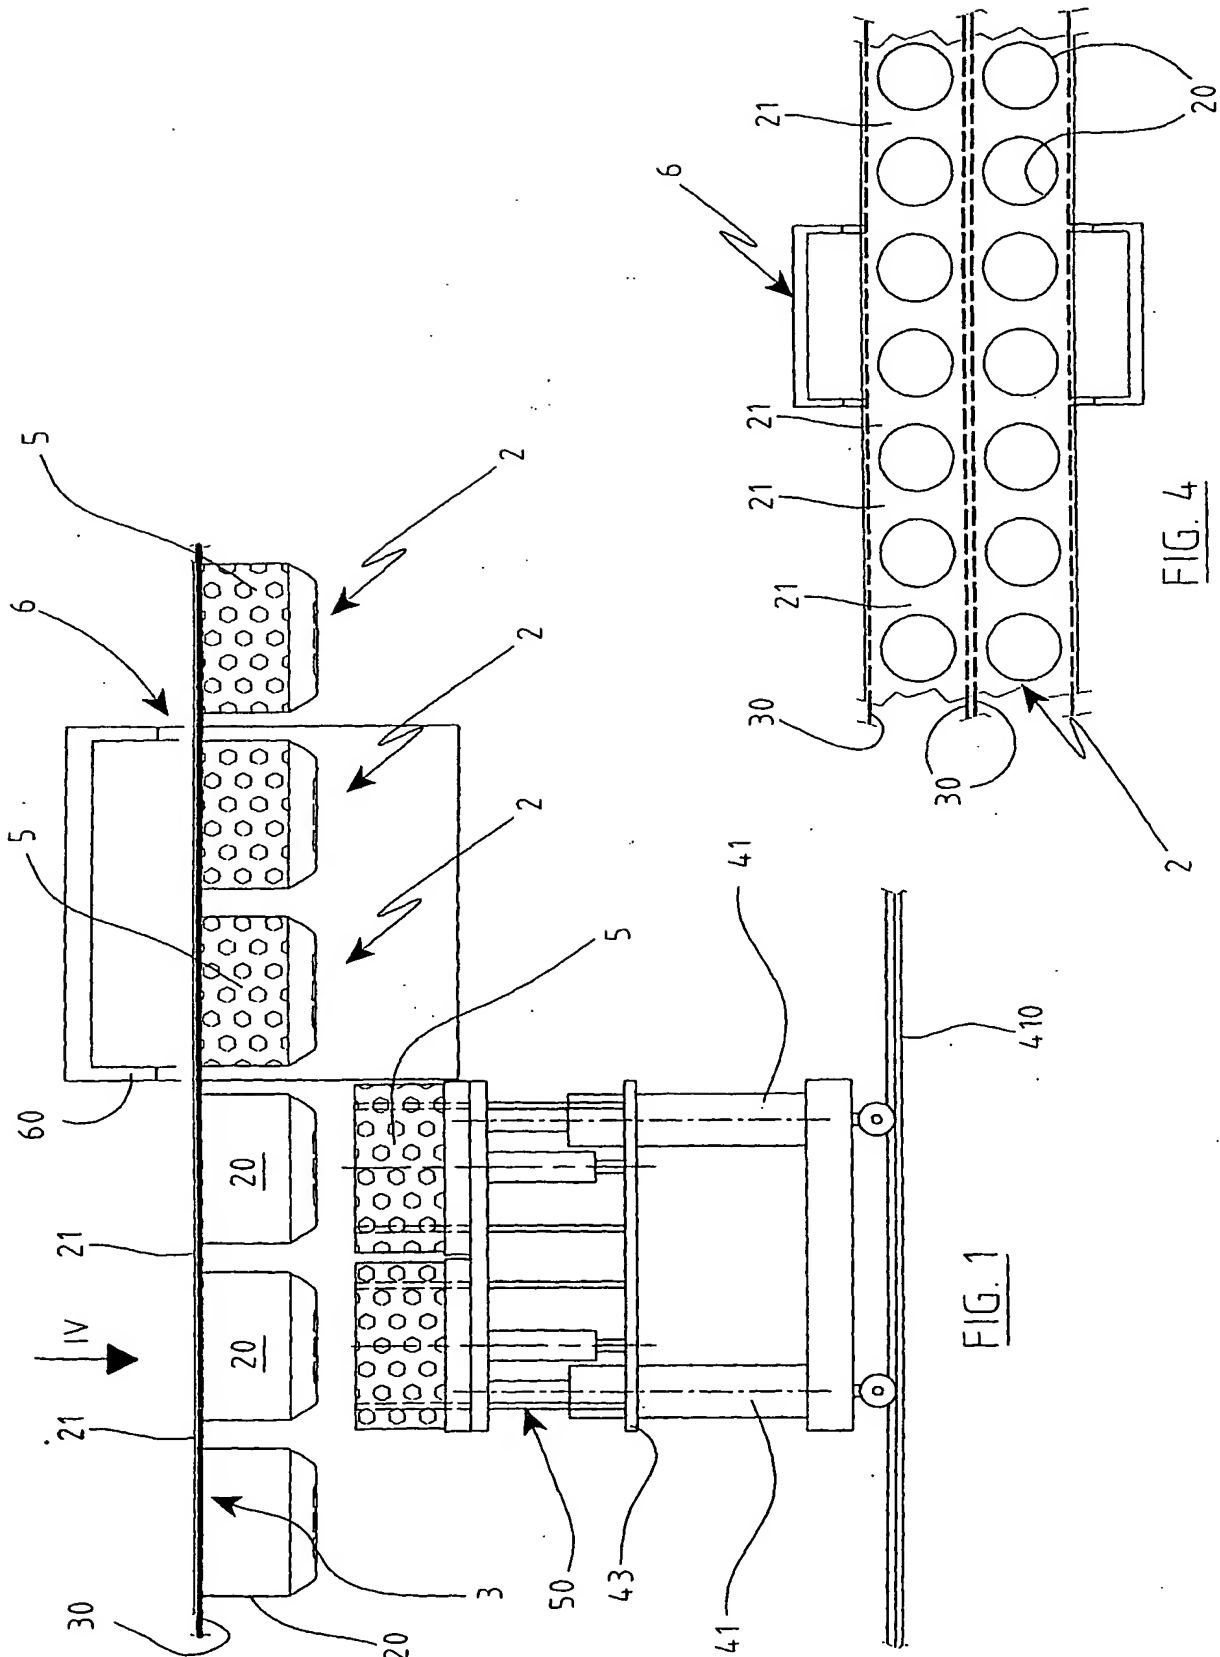


FIG. 3

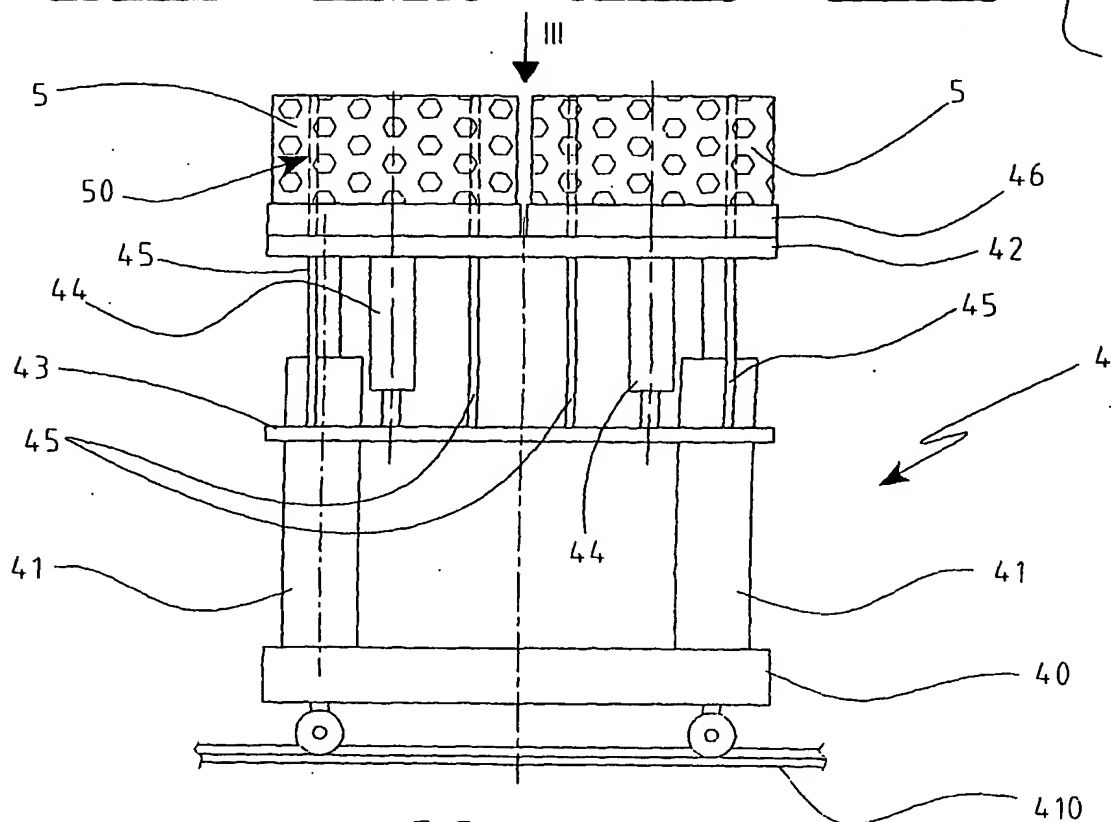
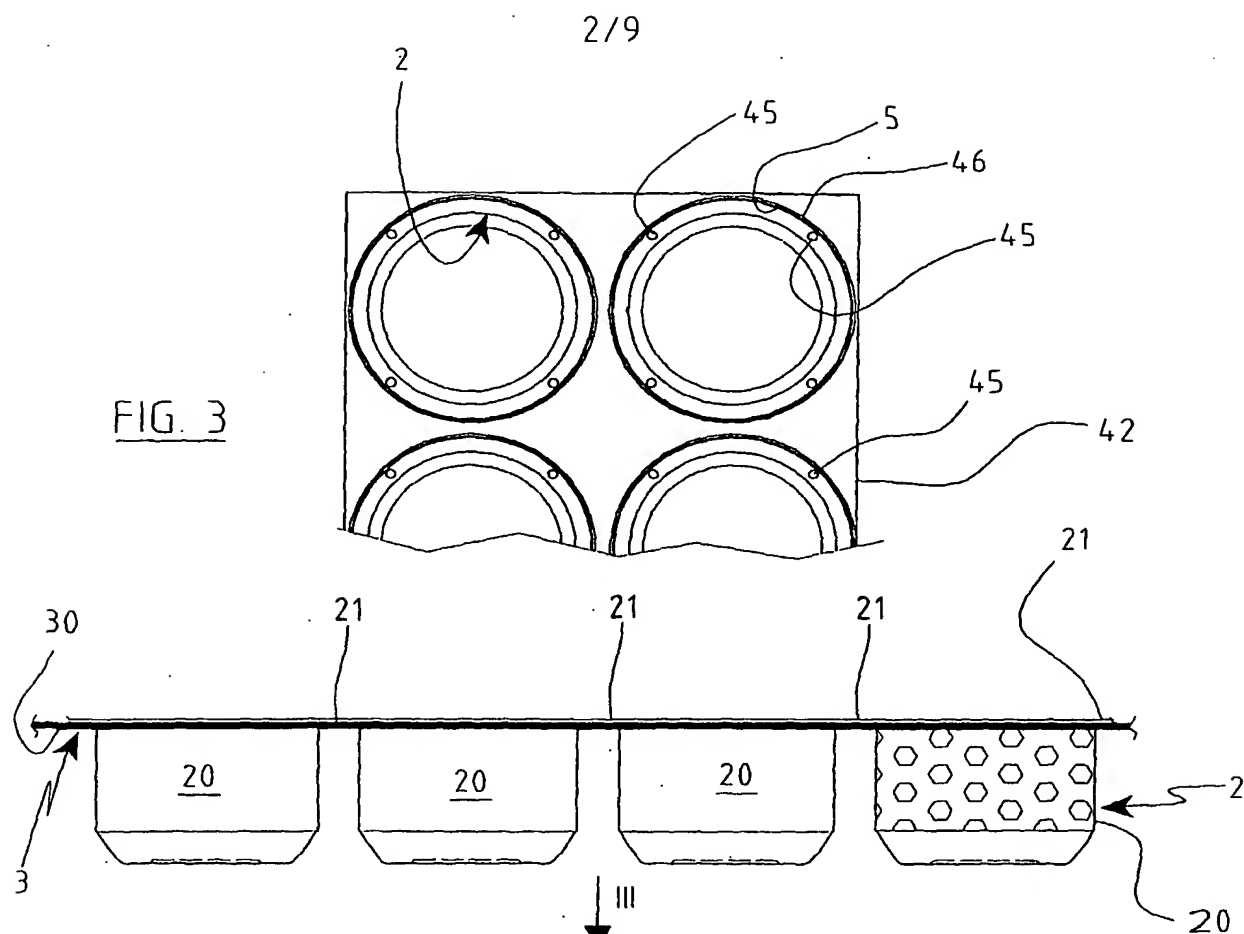
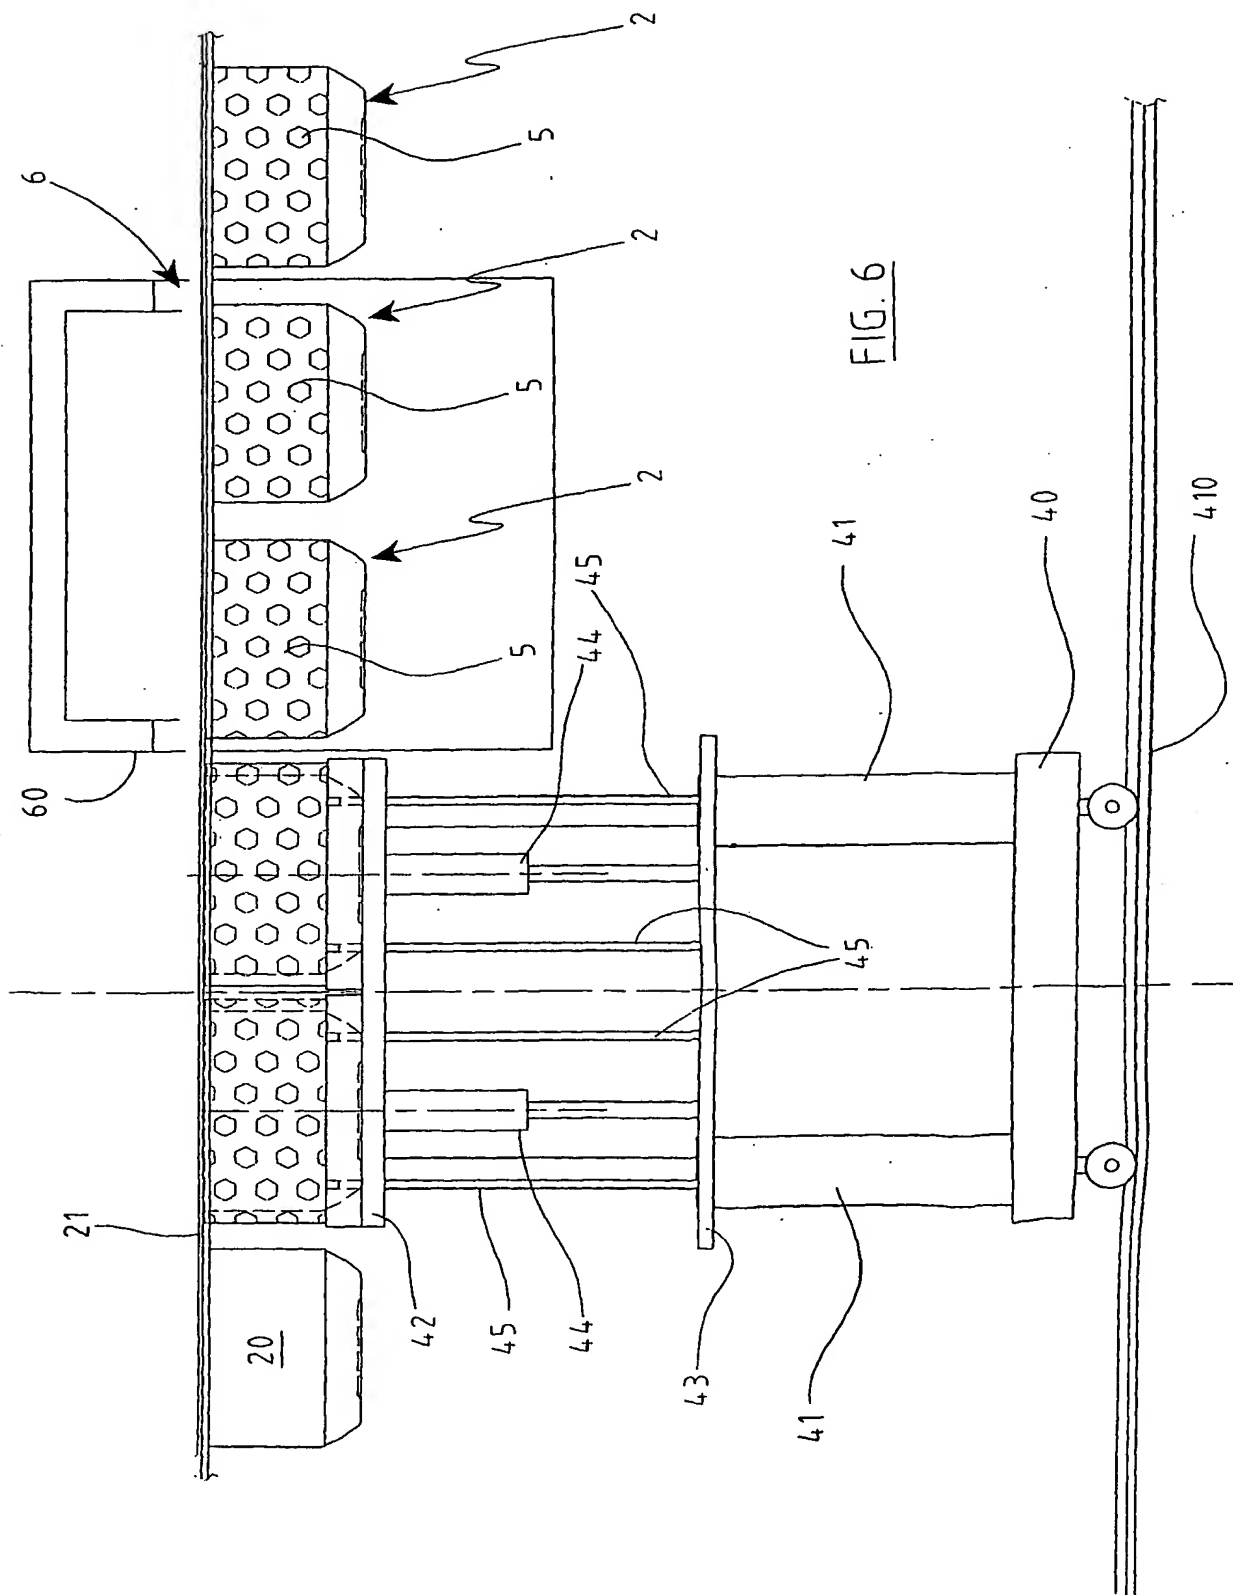


FIG. 2







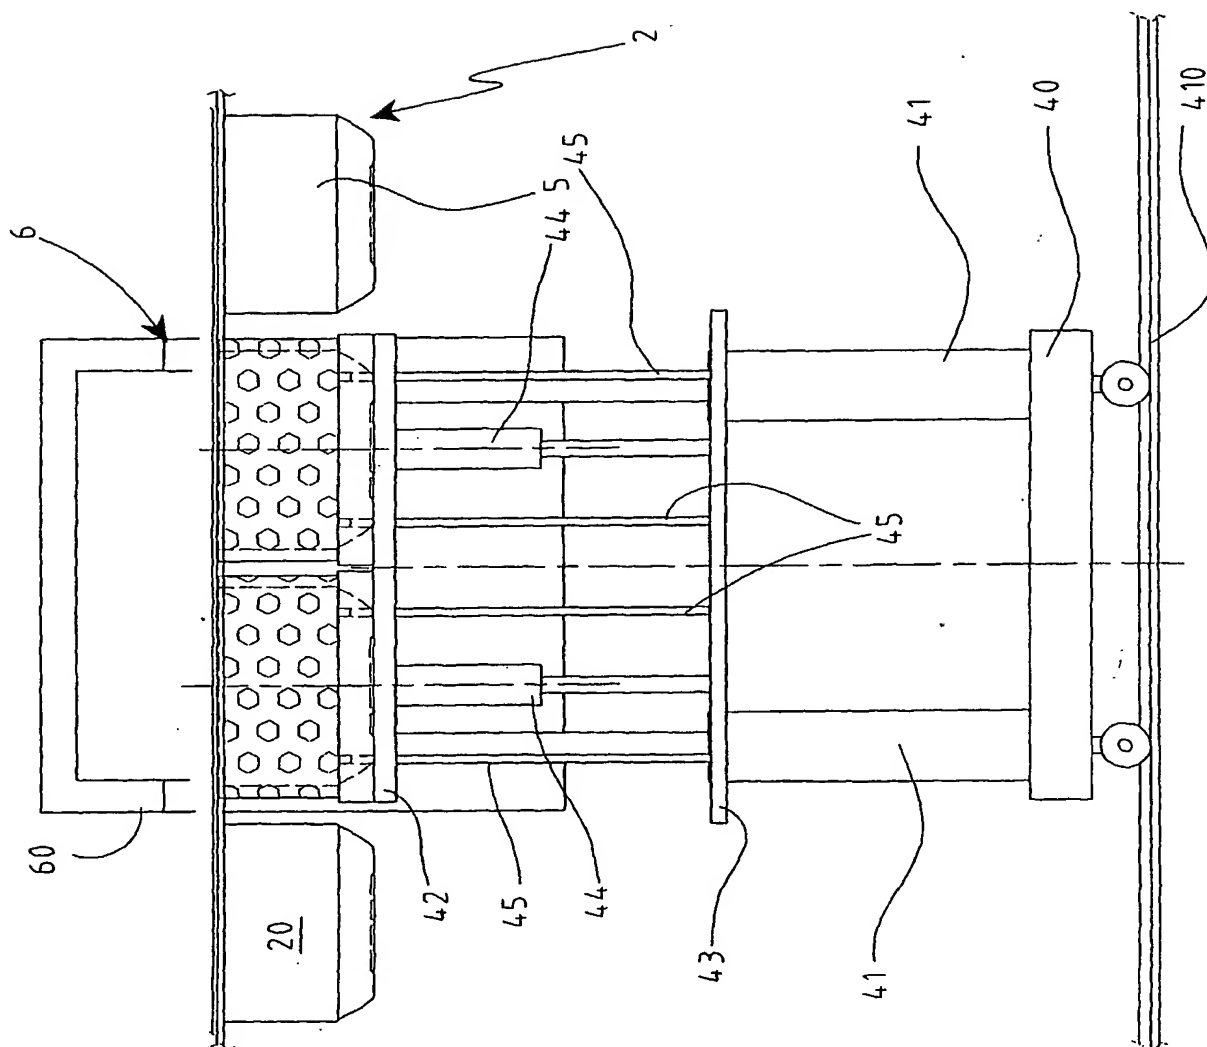


FIG. 7



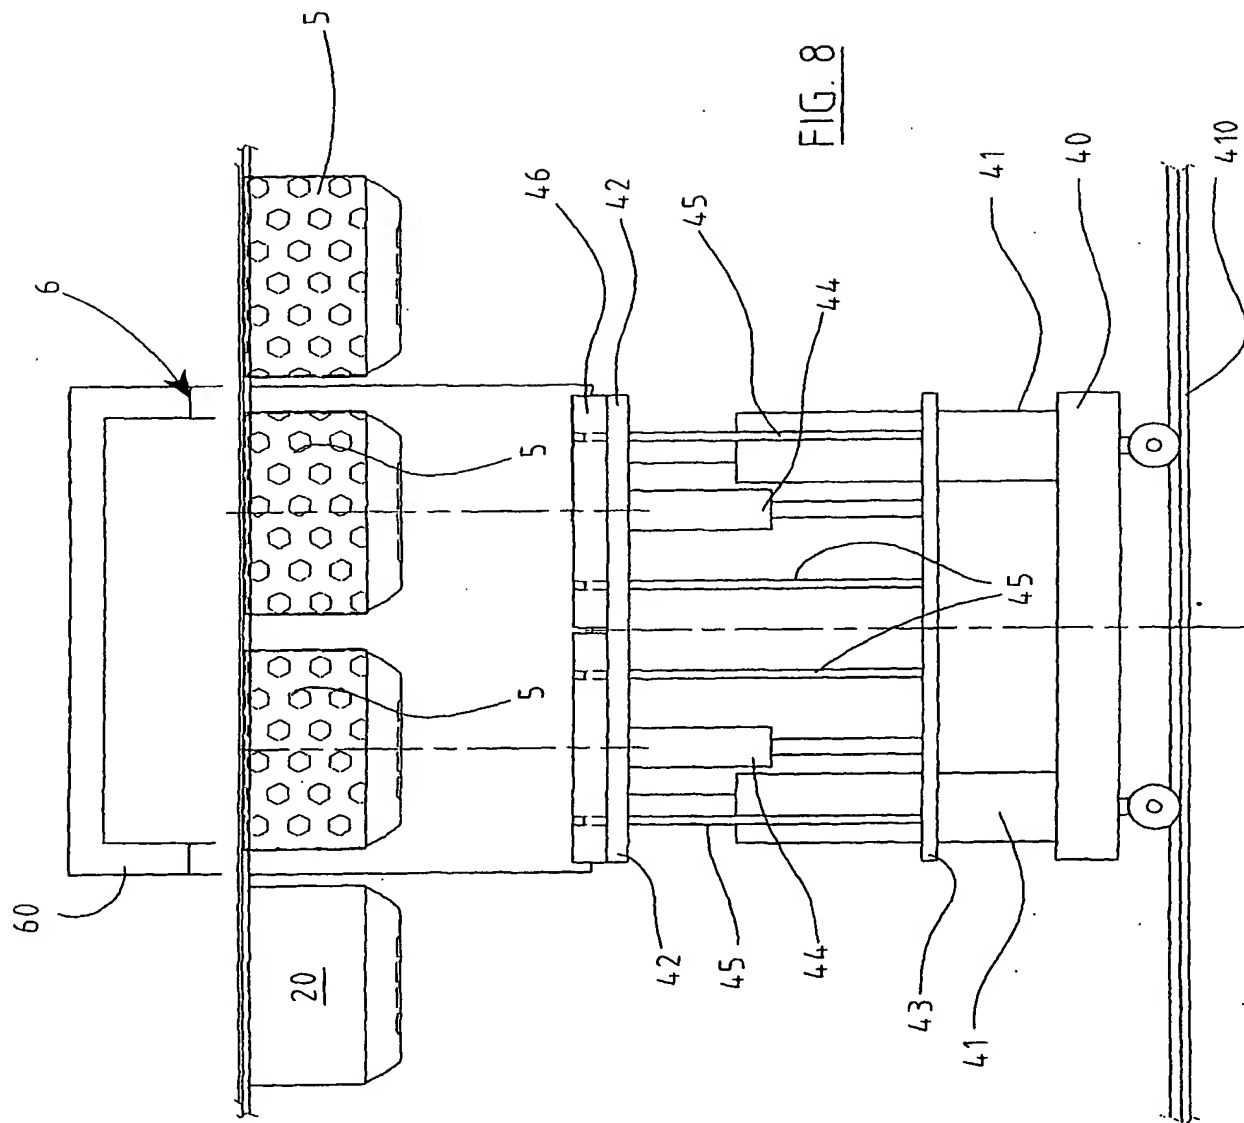

8/9

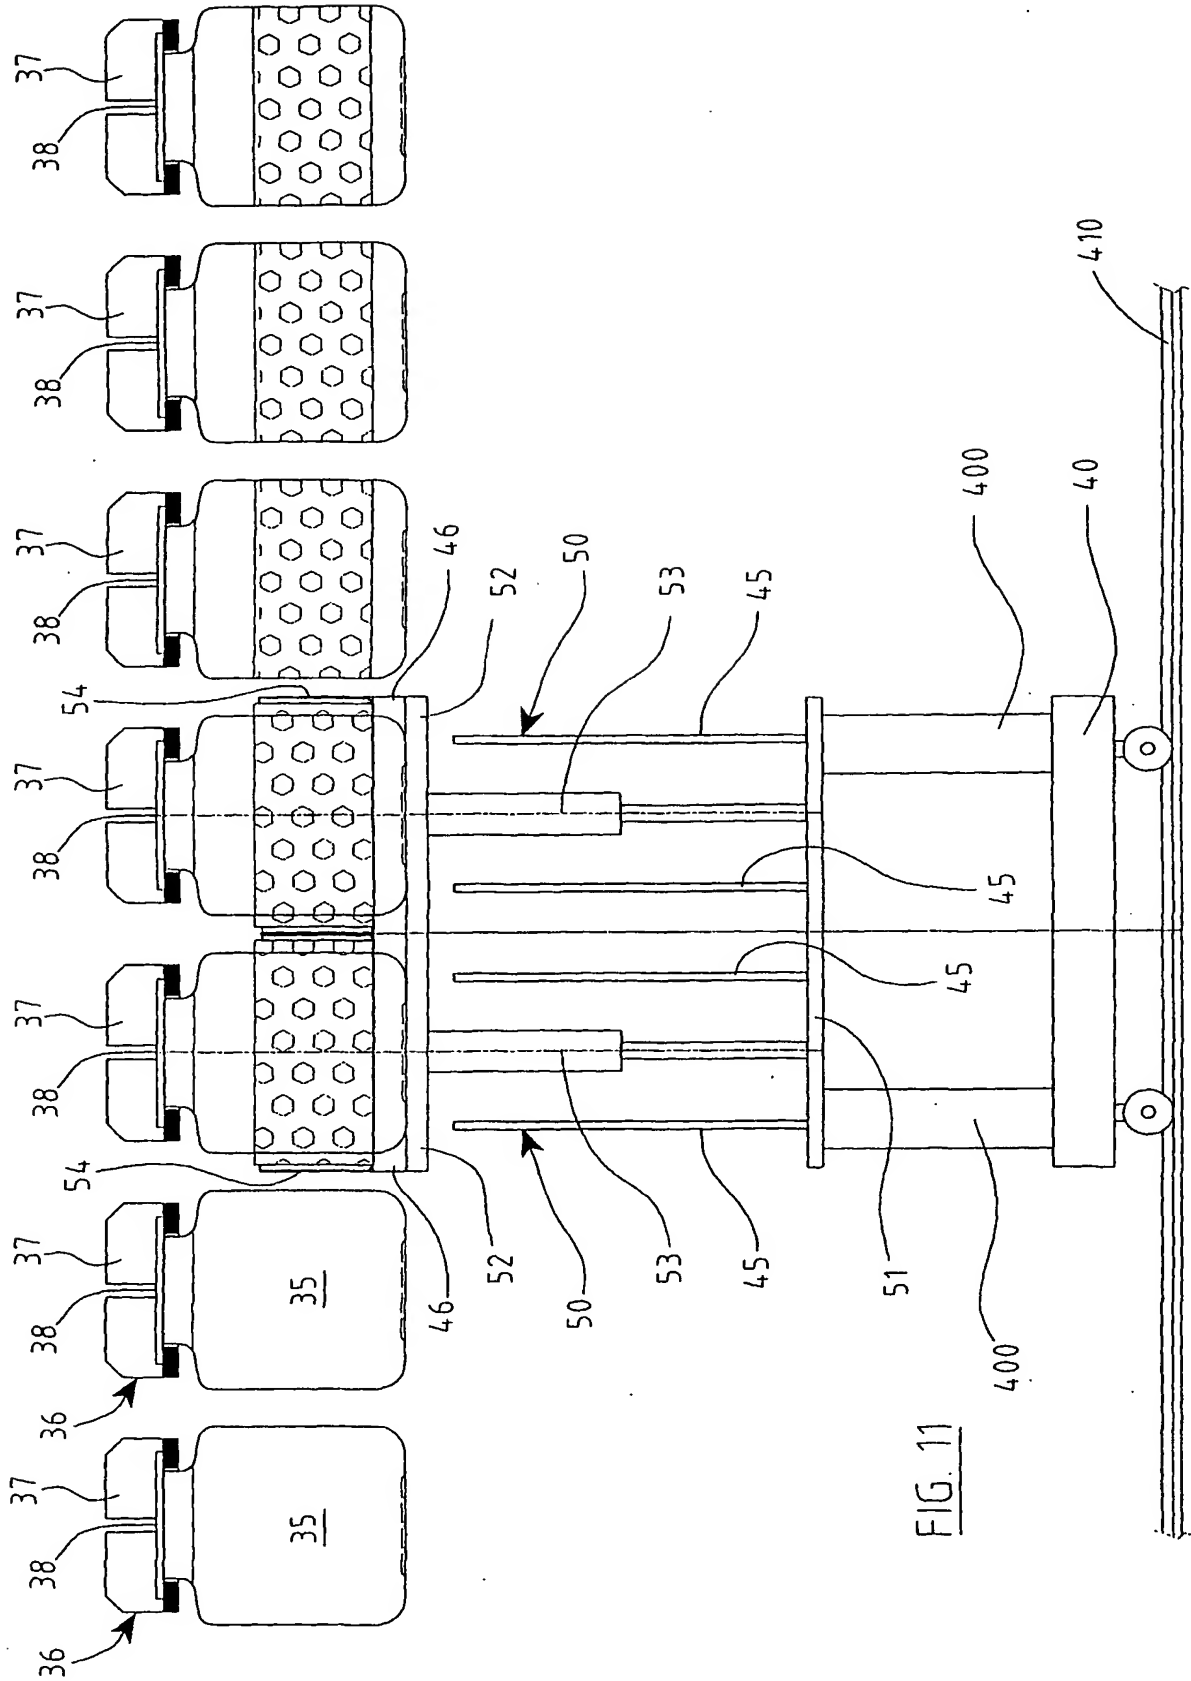

9/9

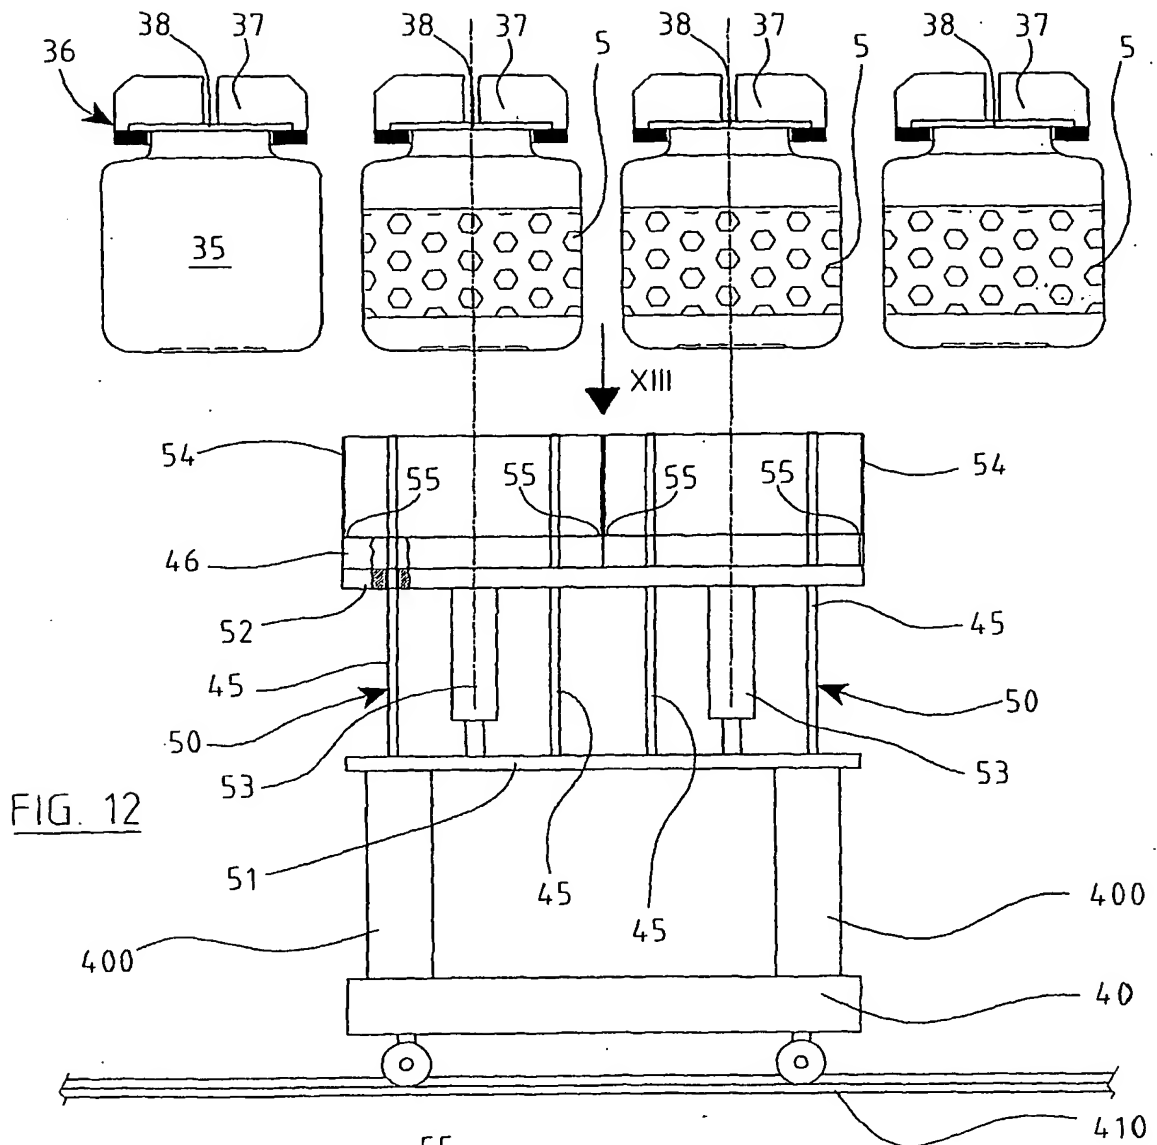


FIG. 12

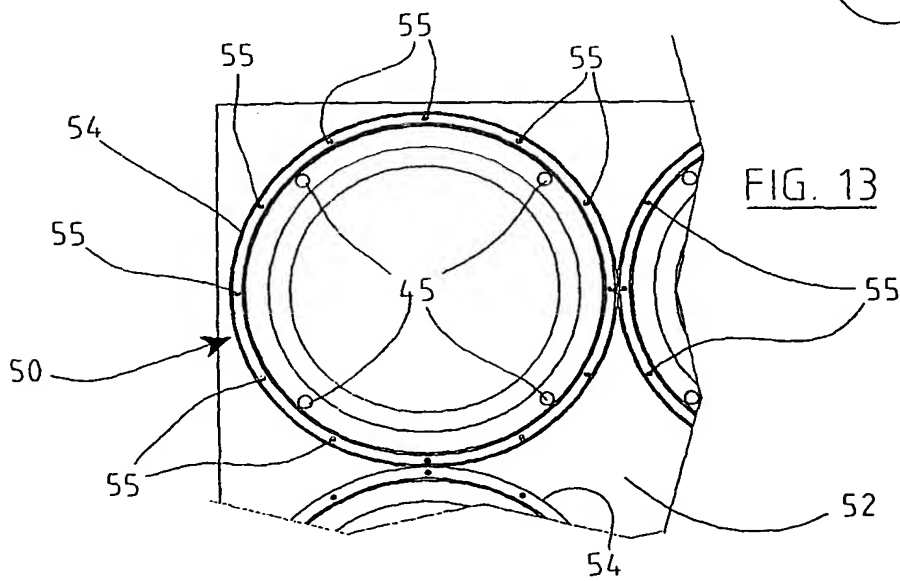


FIG. 13